



## Solutions

Change in K.E = $\frac{1}{2} \times 3.5 (12^2 - 8^2)$ (= 140)	<b>B1</b>
Change in P.E = $3.5 \times 9.8 \times 14 \sin 20$	<b>M1</b>
Change in P.E = 164.238	<b>A1</b>
Change in energy = change in KE + change in PE	<b>M1</b>
Change in energy = 304J	<b>A1</b>





## Solutions

1a.

$K.E = \frac{1}{2} \times 3 \times 8^2$	<b>B1</b>
$= 96 \text{ J}$	<b>B1</b>


1b

$F = \mu 3g$	<b>B1</b>
Using work energy principle	<b>M1</b>
$\mu 3g \times 12 = 96$	<b>A1</b>
$\mu = 0.27 \text{ (or } 0.272)$	<b>A1</b>





## Solutions

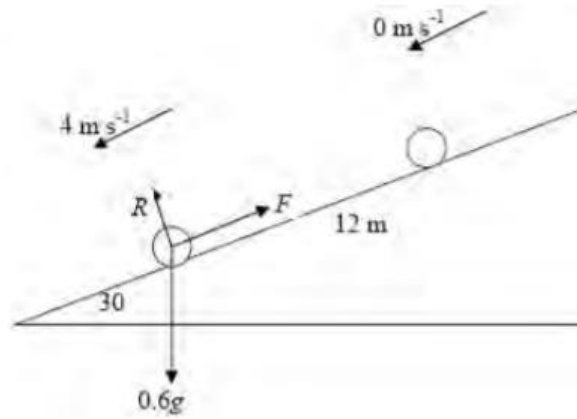

K.E. Gained = $\frac{1}{2} \times 0.6 \times 4^2$	<b>M1</b>
P.E. Lost = $0.6 \times g \times (12 \sin 30)$	<b>M1</b>
Change in energy = P.E. lost – K.E. gained $= 0.6 \times g \times 12 \sin 30 - \frac{1}{2} \times 0.6 \times 4^2$	<b>M1</b>
Work done against friction = 30 or 30.5J	<b>A1</b>



## Solutions

1a.

$P.E \text{ Lost} = 3 \times g \times 8 \sin 30 = 3 \times g \times 8 \times 0.5$	<b>M1</b>
$P.E \text{ Lost} = 117.6 \text{ J}$	<b>A1</b>

1b.

$K.E \text{ gained} = \frac{1}{2} \times 3 \times 5^2$	<b>M1</b>
$K.E \text{ gained} = 37.5 \text{ J}$	<b>A1</b>
Work-energy: $F \times 8 = 117.6 - 37.5$	<b>M1</b>
$F = 10.0125 \text{ N}$	<b>A1</b>







## Solutions

1a.

$T_r = \frac{2400}{12} (= 2000)$	<b>M1</b>
Using Newton's second law	<b>M1</b>
$T_r - 1200 = 1000 \times f$	<b>A1</b>
$f = 0.8$	<b>A1</b>

1b.

Work energy principle	<b>M1</b>
$= \frac{1}{2} \times 1000 \times 14^2 = 1200d$	<b>A1</b>
$d = 81.666\dots = 81.7$	<b>A1</b>

1c.

Resistances may vary with speed	<b>B1</b>
---------------------------------	-----------





## Solutions

1a.

Driving force = $\frac{P}{v}$	<b>B1</b>
$\frac{21000}{v} = 600$	<b>M1</b>
$v = 35 \text{ ms}^{-1}$	<b>A1</b>

1b.

$\frac{P}{v} = 600 + 1200 \times g \times \frac{1}{14}$	<b>M1</b>
$\frac{P}{v} = 1400 \text{ N}$	<b>A1</b>
$\frac{21000}{v} = 1440$	<b>M1</b>
$v = \frac{21000}{1440}$	
$v = 14.6 \text{ or } 15 \text{ ms}^{-1}$	<b>A1</b>

